


S-Videoケーブル 5m, 10m

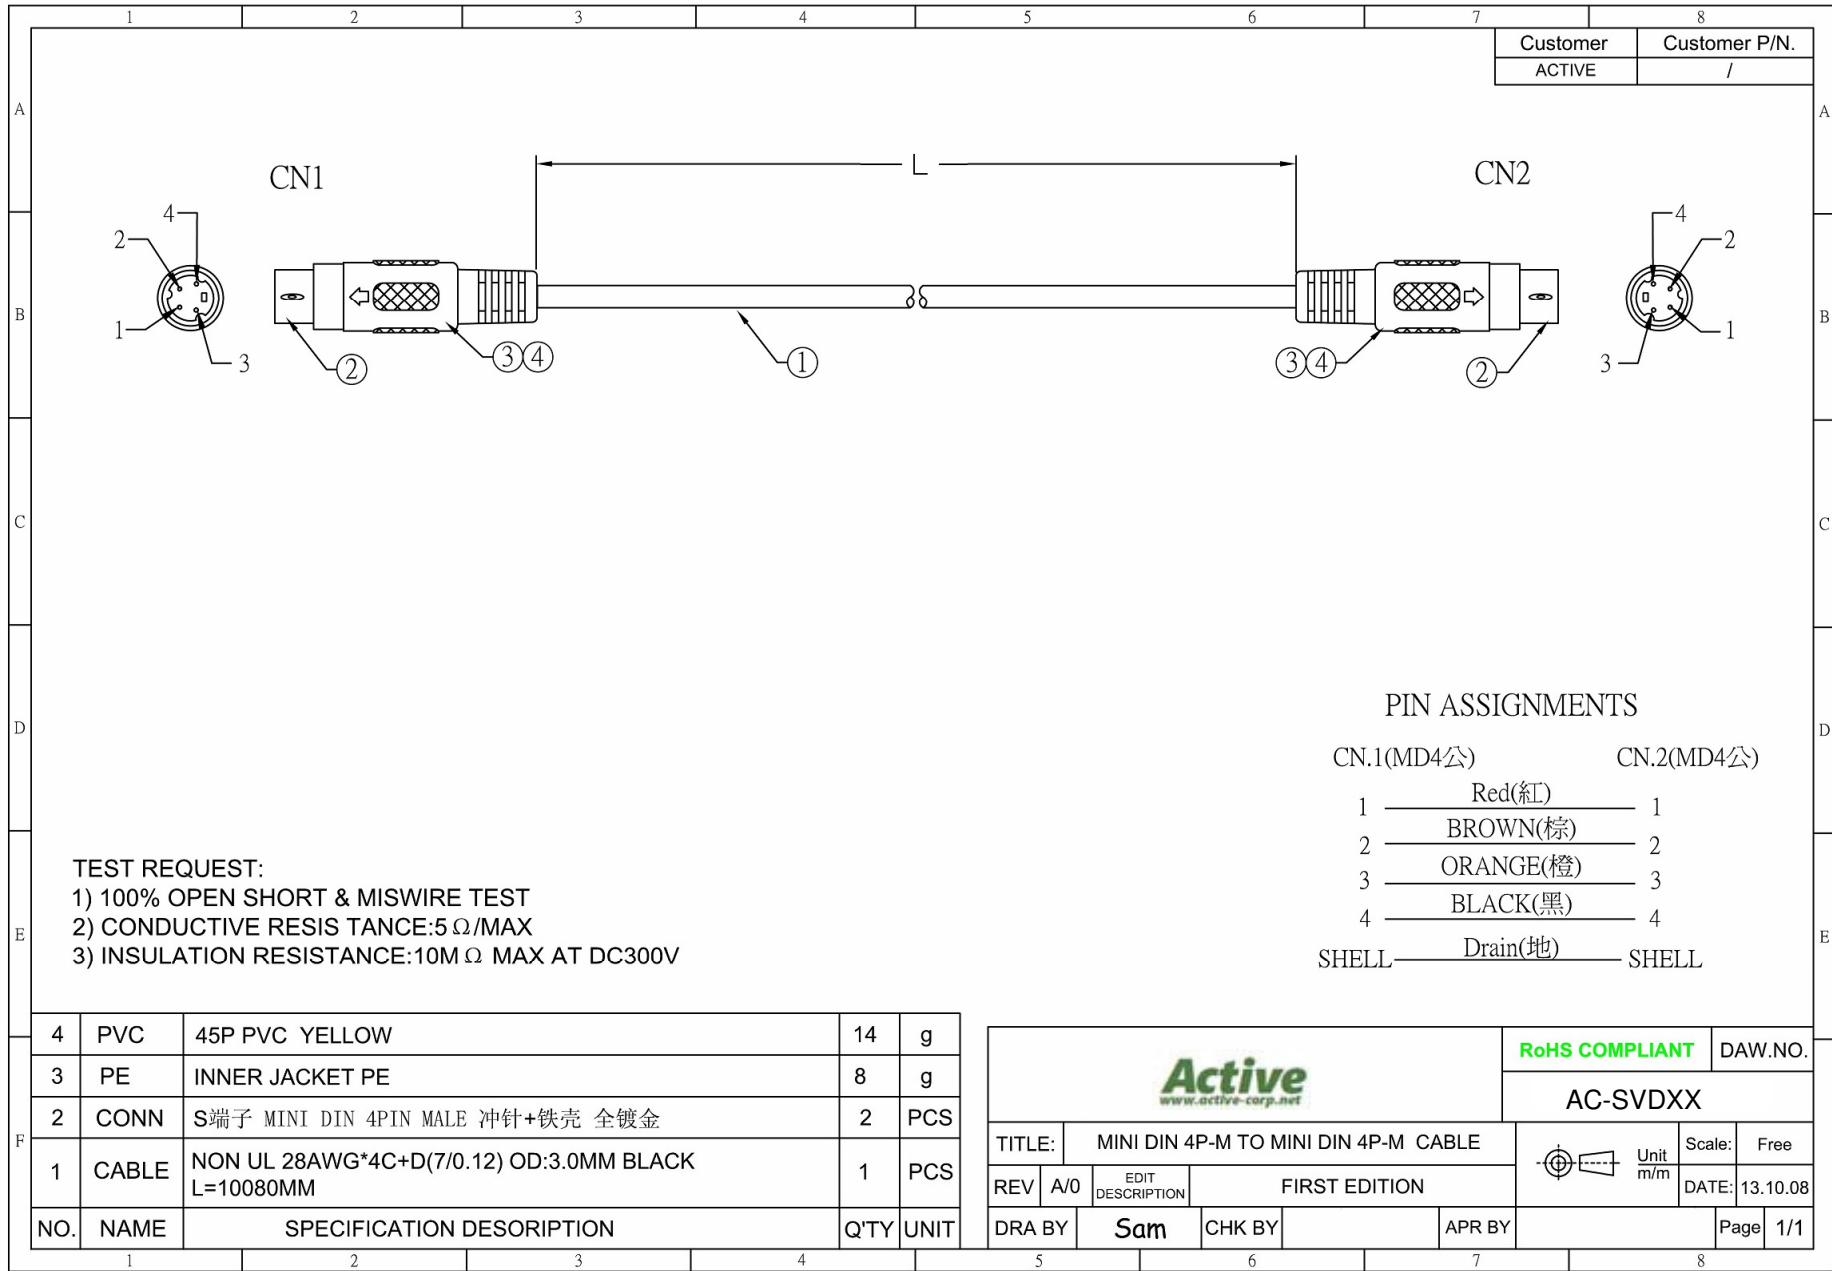


Customer	Customer P/N.
ACTIVE	/

TEST REQUEST:
 1) 100% OPEN SHORT & MISWIRE TEST
 2) CONDUCTIVE RESIS TANCE:5Ω/MAX
 3) INSULATION RESISTANCE:10MΩ MAX AT DC300V

PIN ASSIGNMENTS

CN.1(MD4公)		CN.2(MD4公)	
1	Red(紅)	1	
2	BROWN(棕)	2	
3	ORANGE(橙)	3	
4	BLACK(黒)	4	
SHELL		Drain(地)	SHELL

4	PVC	45P PVC YELLOW	14	g
3	PE	INNER JACKET PE	8	g
2	CONN	S端子 MINI DIN 4PIN MALE 冲针+铁壳 全镀金	2	PCS
1	CABLE	NON UL 28AWG*4C+D(7/0.12) OD:3.0MM BLACK L=10080MM	1	PCS
NO.	NAME	SPECIFICATION DESORIPTION	Q'TY	UNIT

 www.active-corp.net				RoHS COMPLIANT		DAW.NO.	
AC-SVDXX							
TITLE: MINI DIN 4P-M TO MINI DIN 4P-M CABLE				Unit: m/m		Scale: Free	
REV	A/0	EDIT DESCRIPTION	FIRST EDITION			DATE: 13.10.08	
DRA BY: Sam		CHK BY:		APR BY:		Page: 1/1	