


USB(A-B)ケーブル 5m

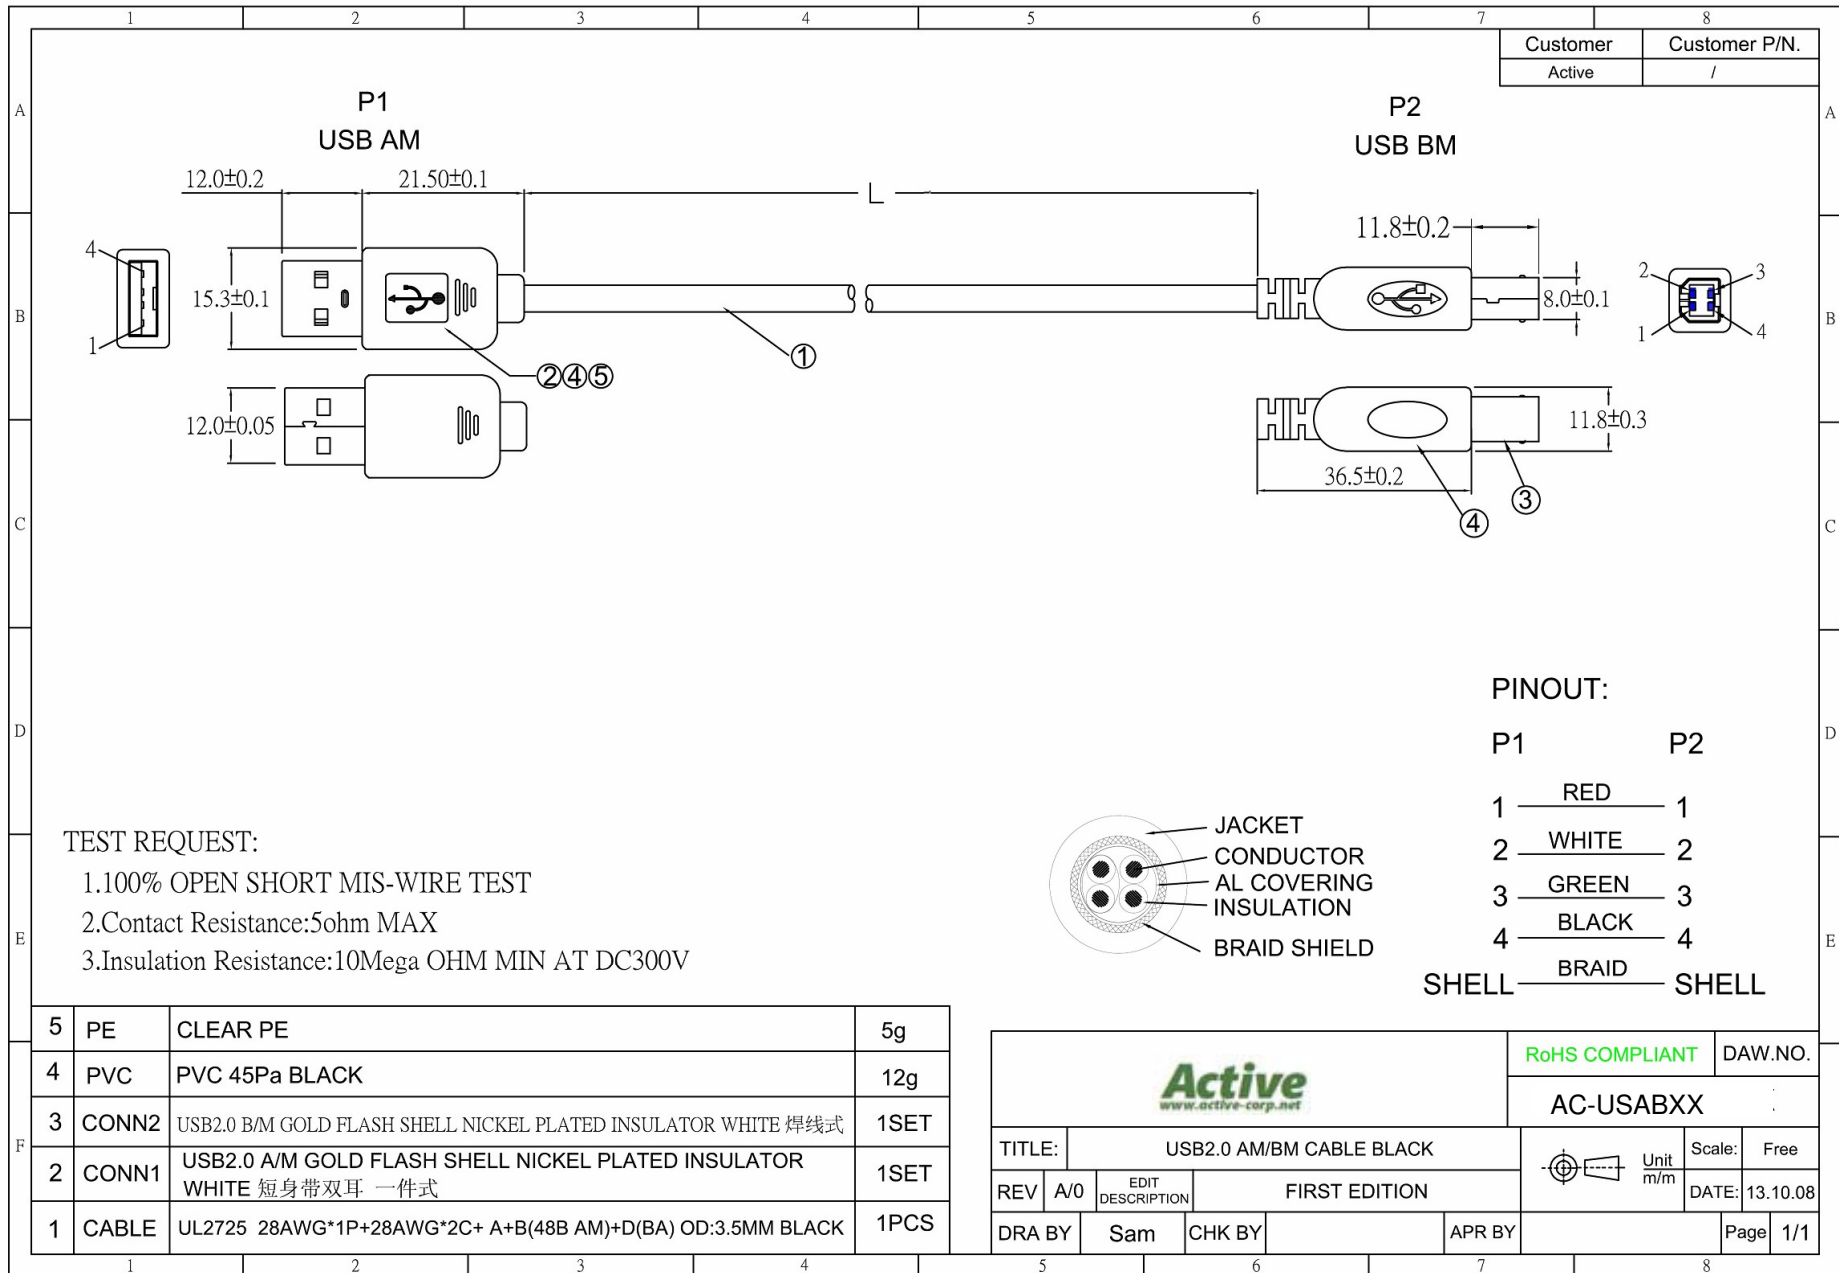


Customer	Customer P/N.
Active	/

TEST REQUEST:
 1.100% OPEN SHORT MIS-WIRE TEST
 2.Contact Resistance:5ohm MAX
 3.Insulation Resistance:10Mega OHM MIN AT DC300V

PINOUT:

P1	P2
1 — RED —	1
2 — WHITE —	2
3 — GREEN —	3
4 — BLACK —	4
SHELL — BRAID —	SHELL



5	PE	CLEAR PE	5g
4	PVC	PVC 45Pa BLACK	12g
3	CONN2	USB2.0 B/M GOLD FLASH SHELL NICKEL PLATED INSULATOR WHITE 焊线式	1SET
2	CONN1	USB2.0 A/M GOLD FLASH SHELL NICKEL PLATED INSULATOR WHITE 短身带双耳 一件式	1SET
1	CABLE	UL2725 28AWG*1P+28AWG*2C+ A+B(48B AM)+D(BA) OD:3.5MM BLACK	1PCS

Active www.active-corp.net				RoHS COMPLIANT		DAW.NO.	
AC-USABXX							
TITLE: USB2.0 AM/BM CABLE BLACK				Unit: m/m		Scale: Free	
REV	A/0	EDIT DESCRIPTION	FIRST EDITION			DATE: 13.10.08	
DRA BY: Sam		CHK BY:		APR BY:		Page: 1/1	