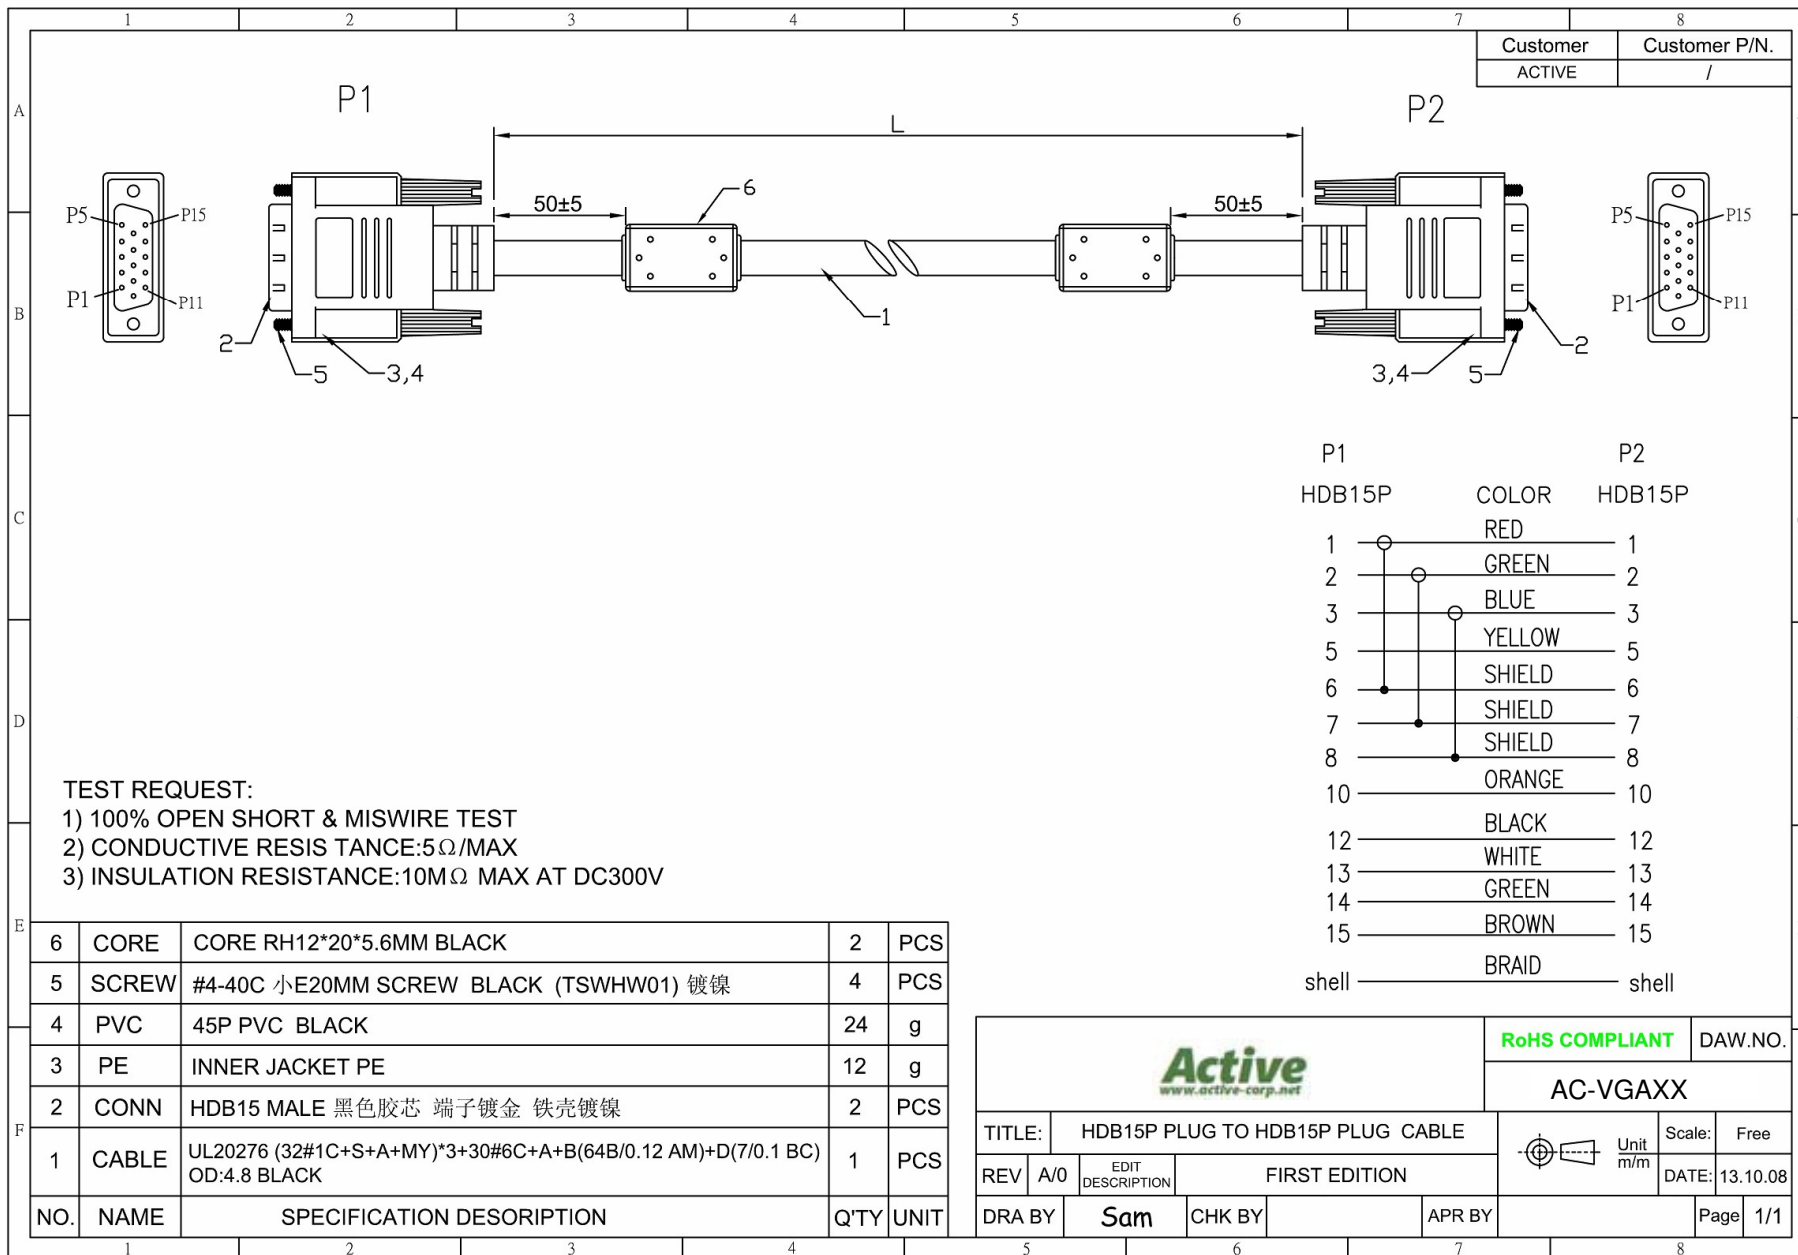


VGAケーブル 30cm, 1.5m, 2.5m, 3m, 5m, 7m, 10m





Customer	Customer P/N.
ACTIVE	/

P1	COLOR	P2
HDB15P		HDB15P
1	RED	1
2	GREEN	2
3	BLUE	3
5	YELLOW	5
6	SHIELD	6
7	SHIELD	7
8	SHIELD	8
10	ORANGE	10
12	BLACK	12
13	WHITE	13
14	GREEN	14
15	BROWN	15
shell	BRAID	shell

TEST REQUEST:
 1) 100% OPEN SHORT & MISWIRE TEST
 2) CONDUCTIVE RESISTANCE: 5Ω/MAX
 3) INSULATION RESISTANCE: 10MΩ MAX AT DC300V

NO.	NAME	SPECIFICATION DESCRIPTION	Q'TY	UNIT
6	CORE	CORE RH12*20*5.6MM BLACK	2	PCS
5	SCREW	#4-40C 小E20MM SCREW BLACK (TSWHW01) 鍍镍	4	PCS
4	PVC	45P PVC BLACK	24	g
3	PE	INNER JACKET PE	12	g
2	CONN	HDB15 MALE 黑色胶芯 端子镀金 铁壳镀镍	2	PCS
1	CABLE	UL20276 (32#1C+S+A+MY)*3+30#6C+A+B(64B/0.12 AM)+D(7/0.1 BC) OD:4.8 BLACK	1	PCS

 www.active-corp.net		RoHS COMPLIANT		DAW.NO.
		AC-VGAXX		
TITLE: HDB15P PLUG TO HDB15P PLUG CABLE		 Unit m/m	Scale: Free	
REV	A/0		EDIT DESCRIPTION: FIRST EDITION	DATE: 13.10.08
DRA BY	Sam	CHK BY	APR BY	
			Page 1/1	